



# Fixed-Frequency and Frequency-Agile (Au, HTS) Microstrip Bandstop Filters for L-Band Applications

Eileen M. Saenz  
Ohio University, Athens, Ohio

Guru Subramanyam  
University of Dayton, Dayton, Ohio

Fred W. Van Keuls  
Ohio Aerospace Institute, Brook Park, Ohio

Chonglin Chen  
University of Houston, Houston, Texas

Félix A. Miranda  
Glenn Research Center, Cleveland, Ohio

## The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized data bases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to [help@sti.nasa.gov](mailto:help@sti.nasa.gov)
- Fax your question to the NASA Access Help Desk at 301-621-0134
- Telephone the NASA Access Help Desk at 301-621-0390
- Write to:  
NASA Access Help Desk  
NASA Center for AeroSpace Information  
7121 Standard Drive  
Hanover, MD 21076



# Fixed-Frequency and Frequency-Agile (Au, HTS) Microstrip Bandstop Filters for L-Band Applications

Eileen M. Saenz  
Ohio University, Athens, Ohio

Guru Subramanyam  
University of Dayton, Dayton, Ohio

Fred W. Van Keuls  
Ohio Aerospace Institute, Brook Park, Ohio

Chonglin Chen  
University of Houston, Houston, Texas

Félix A. Miranda  
Glenn Research Center, Cleveland, Ohio

Prepared for the  
Applied Superconductivity Conference  
sponsored by the Institute of Electrical and Electronics Engineers  
Virginia Beach, Virginia, September 17–22, 2000

National Aeronautics and  
Space Administration

Glenn Research Center

This report contains preliminary  
findings, subject to revision as  
analysis proceeds.

Available from

NASA Center for Aerospace Information  
7121 Standard Drive  
Hanover, MD 21076  
Price Code: A02

National Technical Information Service  
5285 Port Royal Road  
Springfield, VA 22100  
Price Code: A02

Available electronically at <http://gltrs.grc.nasa.gov/GLTRS>

# Fixed-Frequency and Frequency-Agile (Au, HTS) Microstrip Bandstop Filters for L-Band Applications

Eileen M. Saenz  
Ohio University  
Athens, Ohio 45701

Guru Subramanyam  
Department of Electrical and Computer Engineering  
University of Dayton  
Dayton, Ohio 45469

Fred W. Van Keuls  
Ohio Aerospace Institute  
Brook Park, Ohio 44142

Chonglin Chen  
Texas Center for Superconductivity  
University of Houston  
Houston, Texas 77204

Félix A. Miranda  
National Aeronautics and Space Administration  
Glenn Research Center  
Cleveland, Ohio 44135

**Abstract**—In this work, we report on the performance of a highly selective, compact  $1.83 \times 2.08 \text{ cm}^2$  ( $\sim 0.72 \times 0.82 \text{ in.}^2$ ) microstrip line bandstop filter of  $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$  (YBCO) on  $\text{LaAlO}_3$  (LAO) substrate. The filter is designed for a center frequency of 1.623 GHz for a bandwidth at 3 dB from reference baseline of less than 5.15 MHz, and a bandstop rejection of 30 dB or better. The design and optimization of the filter was performed using Zeland's IE3D circuit simulator. The optimized design was used to fabricate gold (Au) and High-Temperature Superconductor (HTS) versions of the filter. We have also studied an electronically tunable version of the same filter. Tunability of the bandstop characteristics is achieved by the integration of a thin film conductor (Au or HTS) and the non-linear dielectric ferroelectric  $\text{SrTiO}_3$  in a conductor/ferroelectric/dielectric modified microstrip configuration. The performance of these filters and comparison with the simulated data will be presented.

**Index Terms**—L-band Bandstop Filter, High Temperature Superconducting (HTS) thin films,  $\text{LaAlO}_3$  substrates, Ferroelectric thin films, tunable filters.

## I. INTRODUCTION

Since the discovery of High-Temperature Superconductors (HTS) in 1986, many HTS-based planar microwave components such as resonators and filters have been demonstrated. The use of these HTS films in place of normal conductors (e.g., gold and copper) has reduced conductor losses and consequently insertion loss. In recent years, HTS thin-film based filters have been seriously considered for applications in cellular and PCS communications, as well as for some specific radio-

astronomy applications [1]–[4]. For example, HTS pre-select filters are currently being investigated in cellular base-stations for improved selectivity [2].

Also, HTS components have been integrated with ferroelectric thin films to develop low loss, frequency, and phase-agile microwave components [5]–[7]. For radio-astronomy applications, the L-band 21-cm hydrogen line ( $\sim 1.428 \text{ GHz}$ ) is heavily utilized for deep space exploration. Because the spectrum is crowded at these frequencies, suppression of spurious signals is extremely necessary to avoid degradation of the probing frequency band of interest. Therefore, bandstop filters that offer small size, low loss, and ease of integration into the receiver subsystems while maintaining stringent specifications are highly desirable.

In this paper, we report on the performance of a highly selective, compact  $1.83 \times 2.08 \text{ cm}^2$  ( $\sim 0.72 \times 0.82 \text{ in.}^2$ ) bandstop microstrip line L-band filter fabricated using gold (Au) or  $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$  (YBCO) thin films on  $\text{LaAlO}_3$  (LAO). Two versions of the filter have been studied: a fixed-frequency design and a tunable design using a (Au, YBCO)/ $\text{SrTiO}_3$ /LAO superconducting/ferroelectric/dielectric multilayer structure.

## II. DESIGN, FABRICATION, AND TESTING

The bandstop filter was designed for symmetrical stop-band rejection at the center frequency of 1.623 GHz, with the stop-band 3 dB bandwidth (from reference base line) of 5.15 MHz or better. The stop-band rejection needed was  $\geq 30 \text{ dB}$  at the center frequency, and the passband insertion

loss less than 1.0 dB below 1.614 GHz and above 1.634 GHz. To meet the above stringent specifications, the bandstop filter was designed from the traditional Chebychev low-pass prototype synthesis and transformation technique [8]. Due to the higher quality factor (Q) possible with superconductors, the minimum number of poles required was determined to be 3.

The bandstop filter was implemented using the microstrip edge-coupled resonators coupled to a through line. Desired band-rejection characteristics were obtained by optimizing the spacing between the through line and the resonators, and the length of the coupled sections, with the microstrip lines designed for 50  $\Omega$  characteristic impedance on 508  $\mu\text{m}$  (20 mil) LAO substrates. The final optimization of the filter was performed using Zeland's IE3D electromagnetic simulators [9]. The schematic of the optimized filter is shown in Fig. 1. The performance of the filter as modeled using IE3D is shown in Fig. 2. The modeled data comply with all the aforementioned specifications for this filter.

The YBCO/LaAlO<sub>3</sub> filter considered in this work consisted of a 508  $\mu\text{m}$  thick LaAlO<sub>3</sub> substrate with an area of 1.83 $\times$ 2.08 cm<sup>2</sup> coated with a 600 nm thick YBCO HTS film. The filter was fabricated using standard photolithography and chemical etching techniques. A gold (Au) version of the filter was also fabricated by depositing a Au thin film (~2.5  $\mu\text{m}$  thick) on a LaAlO<sub>3</sub> substrate using e-beam evaporation. For both versions of the filter a 2.5  $\mu\text{m}$  thick gold ground plane film was deposited on the side of the substrate opposite to the circuit.

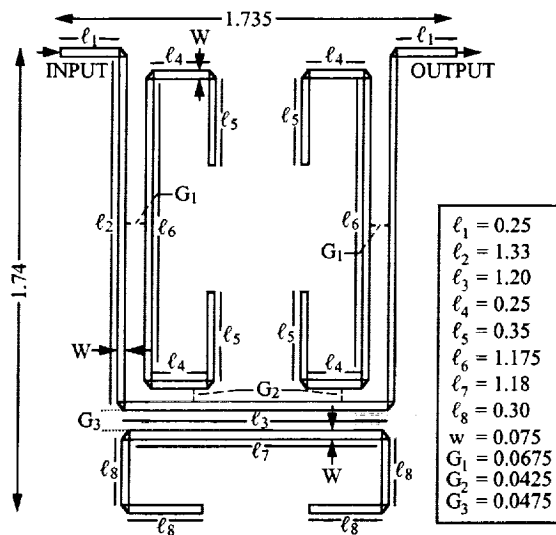


Fig. 1.—Schematic representation of the YBCO/LaAlO<sub>3</sub> bandstop filter. All dimensions are in centimeters.

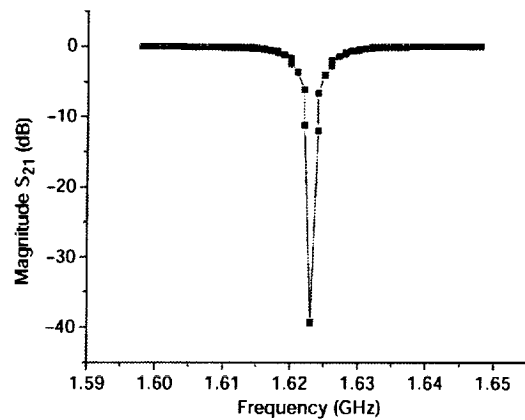


Fig. 2.—Plot of simulated data for the YBCO/LAO filter. The filter has a center frequency of 1.623 GHz, a bandstop rejection of 39 dB, and a bandwidth of 5 MHz at 3 dB. The simulation was performed using Zeland's IE3D electromagnetic simulator.

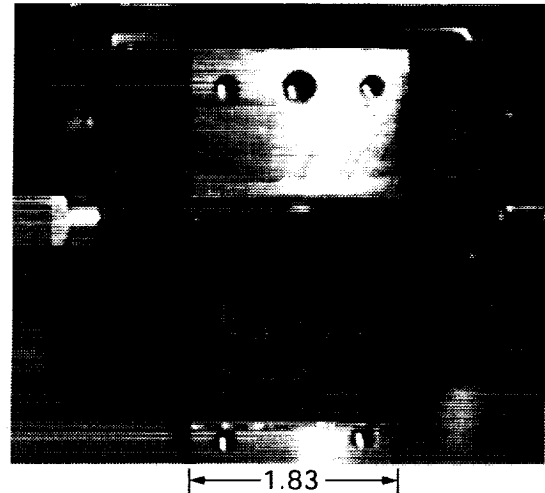


Fig. 3.—The L-band Au/LAO filter mounted on experimental test fixture. The dimension scale is in centimeters.

The microwave characterization of the filter was performed by mounting the filter with silver paint on a custom-made brass test fixture. The microwave signal was launched to the circuit via coaxial SMA connectors. A picture of the filter mounted in the test fixture is shown in Fig. 3. For cryogenic testing of the YBCO filter, the fixture was bolted to the cold finger of a helium gas, closed-cycle refrigerator modified with a vacuum shroud with coaxial feedthroughs for input and output connections to an HP 8510C network analyzer. Measurements were taken under a vacuum of less than 1 mtorr.

A tunable version of the filter was also studied. This version was optimized based on the multilayer structure shown in Fig. 4(a), for a ferroelectric thickness of 300 nm, dielectric constant of  $\epsilon_{\text{rSTO}}=1500$  and loss tangent of  $\tan\delta=0.01$ , which are conservative parameters for STO ferroelectric thin films [10]. Because of the ferroelectric, the optimized design for this version shown in Fig. 4(b) differs from that shown in Fig. 1 for the YBCO/LAO filter. The performance of the YBCO/STO/LAO filter obtained using IE3D is shown in Fig. 5. Note that the filter can be tuned by 2 percent to both sides of the center frequency (1.623 GHz) without degrading the specifications outlined earlier in the paper. Beyond these range, although the filter is tunable up to 5 percent with respect to the center frequency, the impedance mismatches introduced particularly for values of  $\epsilon_{\text{rSTO}} > 2000$  result in filter performance degradation. For the experimental characterization of this filter, dc voltage was applied through gold wire bonds directly connected to the poles of the filter while keeping the transmission line grounded.

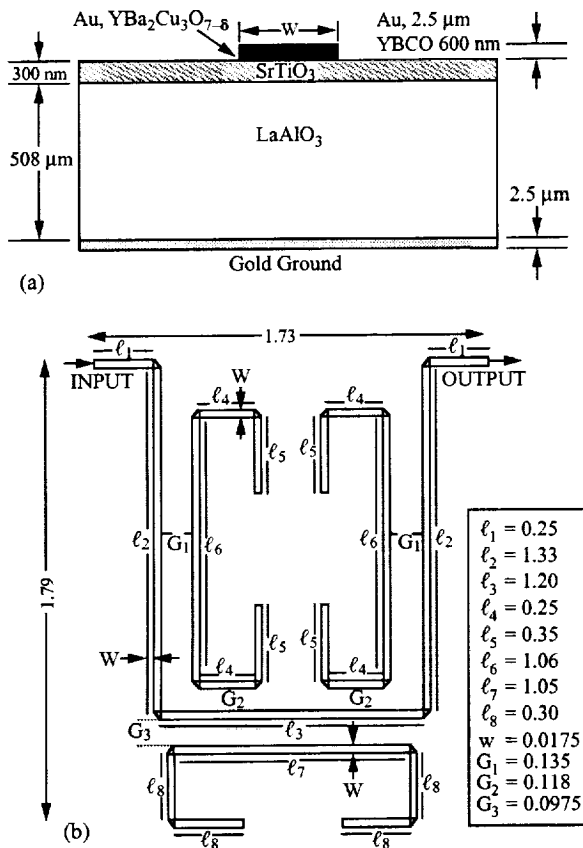


Fig. 4.—(a) Modified microstrip line structure for ferroelectric-base L-band tunable filter. (b) Schematic representation of the YBCO/STO/LAO bandstop filter. All dimensions are in (b) are in centimeters.

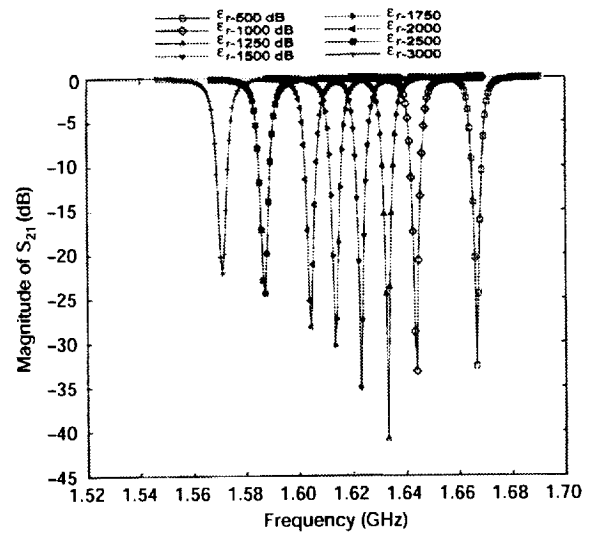


Fig. 5.—Plot of simulated data for the YBCO/STO/LAO filter for different values of STO's dielectric constant and for  $\tan\delta = 0.01$ .

### III. RESULTS

The performance of the Au/LAO version for the fixed-frequency L-band filter is shown in Fig. 6. The filter exhibits a rejection greater than 32 dB at 1.625 GHz (only 2 MHz away from specifications) and insertion losses of less than 1 dB away from the rejection band (markers 2 and 3, Fig. 6). However, the 3 dB bandwidth of the filter is ~47.5 MHz, which is 9 times wider than the specifications. Notwithstanding, these are impressive results given the fact that the optimization process was done for a superconducting filter. This filter exhibited a loaded  $Q \sim 650$  at room temperature.

Figure 7 shows the performance of the YBCO/LAO filter. Data were taken at 60 K, which was the temperature at which the filter exhibited the best performance, possibly due to nonoptimal film quality. In this case the filter exhibits a 3 dB band-width (markers 5 and 4) of ~5.5 MHz, which is very close to the specified bandwidth. However, it shows a rejection of only 24 dB at 1.6471 GHz and an insertion loss away from the bandstop frequency worse than those for the Au-filter counterpart, again possibly due to film quality limitations. This filter exhibited a loaded  $Q \sim 3660$ . The performance of this filter should be improved by using high-quality, double-sided HTS films.

Figure 8(a) shows the performance as a function of temperature of an Au/STO/LAO version of the filter shown in Fig. 4. Note that the reject frequency shifted by 47.5 MHz from 298 to 45 K. Note that the better performance of the filter is realized at 45 K where the value of  $\epsilon_r$  should be above 1000. Figure 8(b) shows the performance of this filter when applying 300 Vdc to the filter's poles ( $E_{\text{max}} = 0.63 \text{ V}/\mu\text{m}$ ), which resulted in a frequency shift of nearly 2 percent, consistent with simulations. Although the tunable filter did not live up to all the specifications of the simulated performance shown in Fig. 5, its performance could be improved by using STO films with higher  $\epsilon_r$  and larger dc bias.

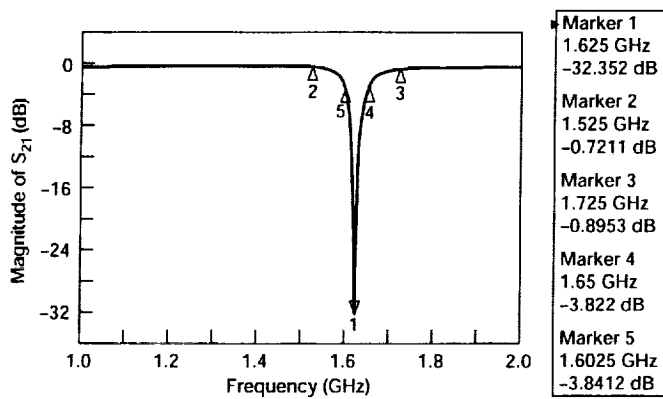


Fig. 6.—Experimental performance of the Au/LAO L-band, 3-pole bandstop filter at room temperature.

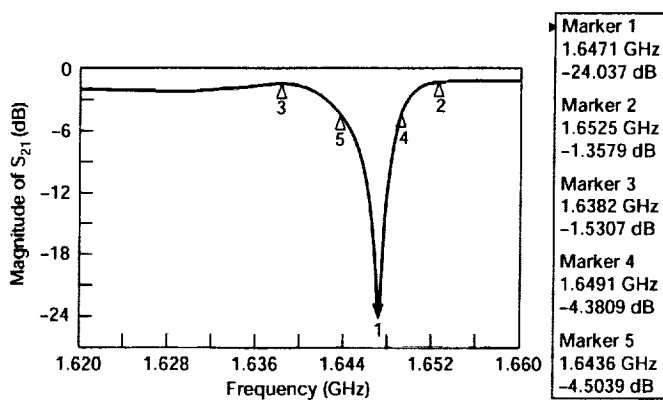


Fig. 7.—Experimental performance of the YBCO/LAO L-band, 3-pole bandstop filter at 60 K.

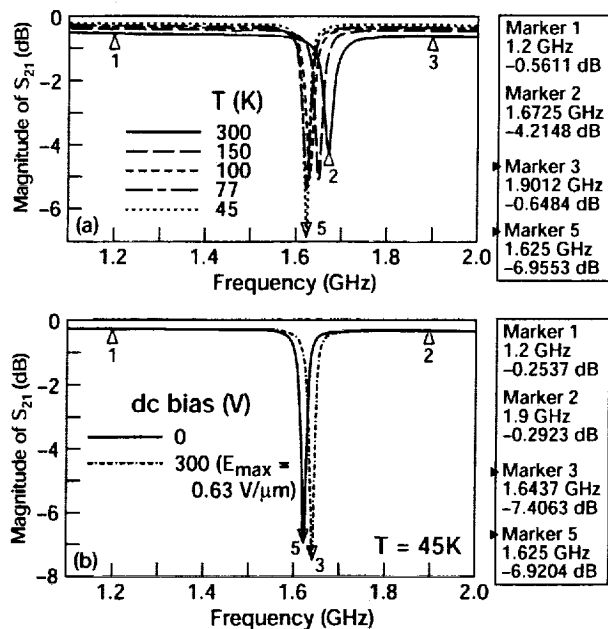


Fig. 8.—Experimental performance of an Au/STO/LAO L-Band, 3-pole bandstop filter as a function of temperature (a) and dc bias voltage (b).

#### IV. CONCLUSIONS

In this work, a compact, highly selective (Au,YBCO)/LAO microstrip bandstop filter has been demonstrated for L-band applications. Both the HTS and gold versions of this filter show promising performance to comply with the stringent specifications upon further optimization. The HTS circuit had a 3 dB band rejection bandwidth of  $\sim 5.5$  MHz, compared to  $\sim 47.5$  MHz for the gold counterpart, and a rejection of 24 dB, which could be improved using very high-quality, double-sided YBCO thin films. We have also shown the feasibility of a frequency tunable version for this filter. Simulated data for a YBCO/STO/LAO filter predict at least 2 percent tunability while maintaining specifications. Attainment of this level of tunability has been demonstrated with an Au/STO/LAO version of the filter. Experimental work is currently underway for optimization of the YBCO/STO/LAO tunable bandstop filter.

#### REFERENCES

- [1] J-S. Hong, M.J. Lancaster, R.B. Greed, D. Jedamzik, J.C. Mage, and H.J. Chaloupka, "A High-Temperature Superconducting Duplexer for Cellular Base Station Applications," *IEEE Transactions on Microwave Theory and Techniques*, Vol. 48, pp. 1336–1343, August 2000.
- [2] R. Keenan, "Superconductors Improve Base-Station Sensitivity," *Wireless Systems Design*, pp. 32–37, July 1997.
- [3] R. Simon, "Expanding opportunities for HTS technology in the wireless industry," *Superconductor and Cryoelectronics*, pp. 9–14, Spring 2000.
- [4] M.W. Sinclair, W.E. Wilson, G.G. Moorey, P.B. Sykes, R.J. Bolton, "A cryogenically cooled, thirteen beam, 21 cm receiver front end," *Electrochemical Society Proceedings*, Vol. 97-2, pp. 336–346, 1997.
- [5] F.A. Miranda, C.H. Mueller, C.D. Cubbage, K.B. Bhasin, R.K. Singh and S. Harkness, "HTS/Ferroelectrics Thin Films for Tunable Microwave Components," *IEEE Trans. on Appl. Supercond.*, Vol. 5, pp. 3191–3194, June 1995.
- [6] R.A. Chakalov, Z.G. Ivanov, Yu. A. Boikov, P. Larsson, E. Carlsson, S. Gevorgian, and T. Claeson, "Fabrication and investigation of  $\text{YBa}_2\text{Cu}_3\text{O}_{7-x}/\text{Ba}_{0.05}\text{Sr}_{0.95}\text{TiO}_3$  thin film structures for voltage tunable devices," *Physica C*, vol. 308, pp. 279–288, 1998.
- [7] Yu. A. Boikov and Z.G. Ivanov, "YBa<sub>2</sub>Cu<sub>3</sub>O<sub>7-x</sub>/SrTiO<sub>3</sub> epitaxial heterostructures on sapphire substrates," *Journal of Alloys and Compounds*, Vol. 251, pp. 193–195, 1997.
- [8] K. Chang, *Handbook of Microwave and Optical Components*, Vol. 1, John Wiley, NY, 1989.
- [9] Zeland's Software, Inc. 29676, Mission Blvd. Fremont, CA 94539.
- [10] M.J. Dalberth, R.E. Stauber, J.C. Price, C.T. Rogers, and D. Galt, "Improved low frequency and microwave dielectric response in strontium titanate thin films grown by pulsed laser ablation," *Appl. Phys. Lett.*, Vol. 72, pp. 507–509 (1998).





REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE April 2001	3. REPORT TYPE AND DATES COVERED Technical Memorandum		
4. TITLE AND SUBTITLE Fixed-Frequency and Frequency-Agile (Au, HTS) Microstrip Bandstop Filters for L-Band Applications		5. FUNDING NUMBERS  WU-297-60-00-00		
6. AUTHOR(S) Eileen M. Saenz, Guru Subramanyam, Fred W. Van Keuls, Chonglin Chen, and Félix A. Miranda				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191		8. PERFORMING ORGANIZATION REPORT NUMBER  E-12464		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001		10. SPONSORING/MONITORING AGENCY REPORT NUMBER  NASA TM-2001-210512		
11. SUPPLEMENTARY NOTES Prepared for the Applied Superconductivity Conference sponsored by the Institute of Electrical and Electronics Engineers, Virginia Beach, Virginia, September 17-22, 2000. Eileen M. Saenz, Ohio University, Athens, Ohio 45701 (work funded by a NASA/OAI Summer Internship Program for Summer 2000 at NASA Glenn Research Center); Guru Subramanyam, Department of Electrical and Computer Engineering, University of Dayton, Dayton, Ohio 45469-0226 (work funded by a NASA/OAI Summer Faculty Fellowship Program for Summer 2000 at NASA Glenn Research Center); Fred W. Van Keuls, Ohio Aerospace Institute, Brook Park, Ohio 44135; Chonglin Chen, Texas Center for Superconductivity, University of Houston, Houston, Texas 77204; and Félix A. Miranda, NASA Glenn Research Center. Responsible person, Félix A. Miranda, organization code 5640, 216-433-6589.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Categories: 33 and 76 Available electronically at <a href="http://gltrs.grc.nasa.gov/GLTRS">http://gltrs.grc.nasa.gov/GLTRS</a> This publication is available from the NASA Center for AeroSpace Information, 301-621-0390.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  In this work, we report on the performance of a highly selective, compact $1.83 \times 2.08 \text{ cm}^2$ ( $\sim 0.72 \times 0.82 \text{ in.}^2$ ) microstrip line bandstop filter of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ (YBCO) on $\text{LaAlO}_3$ (LAO) substrate. The filter is designed for a center frequency of 1.623 GHz for a bandwidth at 3 dB from reference baseline of less than 5.15 MHz, and a bandstop rejection of 30 dB or better. The design and optimization of the filter was performed using Zeland's IE3D circuit simulator. The optimized design was used to fabricate gold (Au) and High-Temperature Superconductor (HTS) versions of the filter. We have also studied an electronically tunable version of the same filter. Tunability of the bandstop characteristics is achieved by the integration of a thin film conductor (Au or HTS) and the nonlinear dielectric ferroelectric $\text{SrTiO}_3$ in a conductor/ferroelectric/dielectric modified microstrip configuration. The performance of these filters and comparison with the simulated data will be presented.				
14. SUBJECT TERMS L-band bandstop filter; High-temperature superconducting thin films; YBCO HTS films; $\text{LaAlO}_3$ substrates; Ferroelectric thin films; $\text{SrTiO}_3$ ; Tunable filters			15. NUMBER OF PAGES 10	
			16. PRICE CODE A02	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	